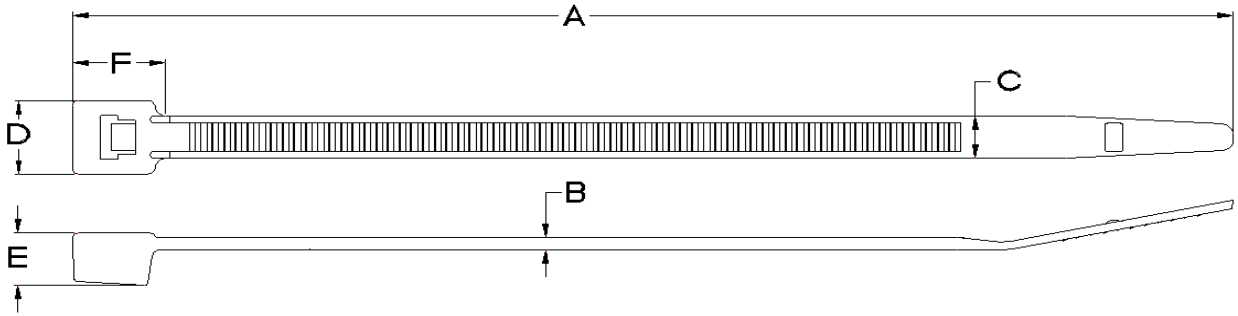

ADVANCED CABLE TIES PART NUMBER	BUNDLE DIAMETER		A IN (mm) +/- .250 (6.350mm)	B IN (mm) +/- .005 (.127mm)	C IN (mm) +/- .005 (.127mm)	D IN (mm) +/- .020 (.508mm)	E IN (mm) +/- .020 (.508mm)	F IN (mm) +/- .005 (.127mm)	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 Mtl FLAMABILITY RATING	PLENUM RATING
	MIN IN (mm)	MAX IN (mm)									
AP (R,L)-15-250-9	.355 (9.017mm)	4.075 (103.505mm)	14.938 (379.425mm)	.077 (1.960mm)	.477 (12.115mm)	.762 (19.354mm)	.384 (9.753mm)	.642 (16.306mm)	247 (1,100)	V-2	N/A
AP (R, L)-15-250-0	.355 (9.017mm)	4.075 (103.505mm)	14.938 (379.425mm)	.077 (1.960mm)	.477 (12.115mm)	.762 (19.354mm)	.384 (9.753mm)	.642 (16.306mm)	247 (1,100)	V-2	N/A
AP (R,L)-22-250-9	.355 (9.017mm)	6.615 (168.021mm)	22.875 (581.025mm)	.077 (1.960mm)	.481 (12.217mm)	.762 (19.354mm)	.387 (9.829mm)	.650 (16.510mm)	247 (1,100)	V-2	N/A
AP (R, L)-22-250-0	.355 (9.017mm)	6.615 (168.021mm)	22.875 (581.025mm)	.077 (1.960mm)	.481 (12.217mm)	.762 (19.354mm)	.387 (9.829mm)	.650 (16.510mm)	247 (1,100)	V-2	N/A

ACT
ADVANCED CABLE TIES, INC.

250 LB. EXTRA HEAVY DUTY SERIES CABLE TIES

COLOR DESIGNATIONS:

0 = UV BLACK 9 = NATURAL

MATERIAL:

NYLON 6/6 POLYAMIDE

REV	DATE	BY	CHK	APPROVE	DESCRIPTION
B	6/3/20	DW	RB	RB	MODIFIED TENSILE STRENGTHS
A	3/12/18	PB	EG	EG	INTITIAL RELEASE

SHEET 1 OF 1	REV.: B	DRAWING NO.: 250-B	
DRAWN BY	DATE	CHECK	SCALE
PB	3/12/18	EG	NONE

CONFIDENTIAL PROPERTY OF ADVANCED CABLE TIES, INC.
THIS DRAWING IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF ADVANCED CABLE TIES, INC.